


PERFORMANCE CURVES


Each pump is tested in accordance with ISO 2548 class C standard.

┘ = Optimum efficiency point


LT Curve No.
616, 618, 620, 622, 624

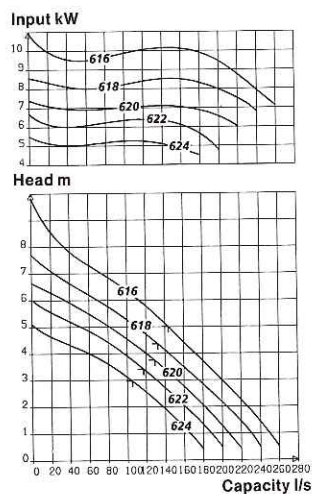


MT Curve No.
430, 431, 432, 434, 436

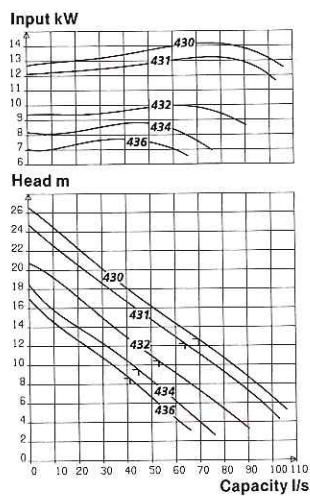


HT Curve No.
450, 452, 454
Pump casing outlet dia. 150 mm

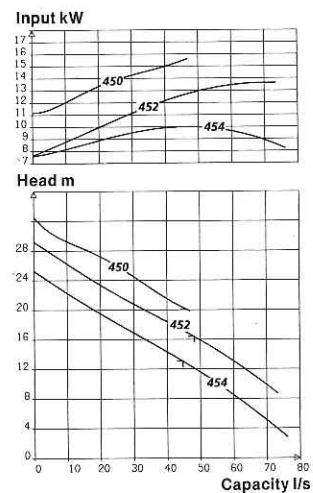


HT Curve No.
450, 452, 454
Pump casing outlet dia. 100 mm

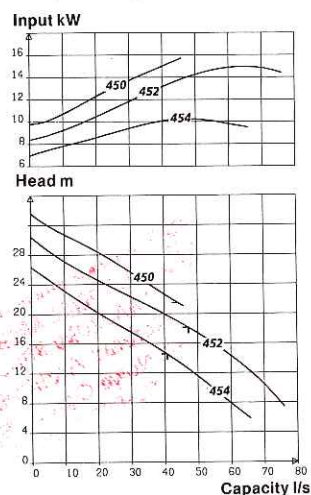


Super HT Curve No.
263—266

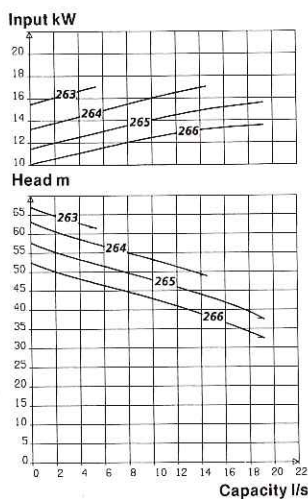


Super HT Curve No.
267, 268, 269

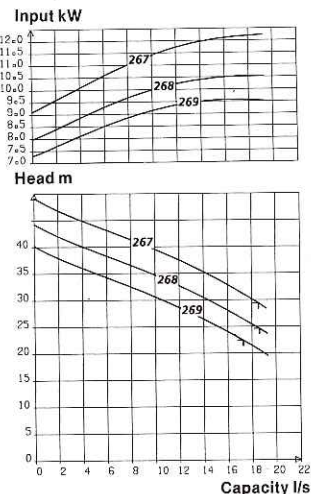

DP Version
MT Curve No.
470, 471

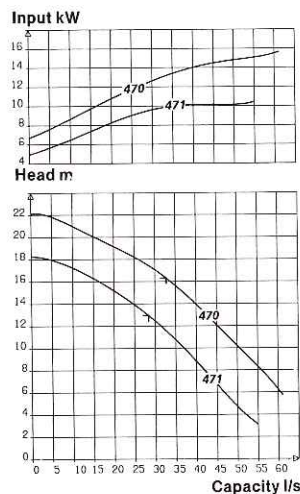

Heavy-duty Version
HT Curve No.
460, 462

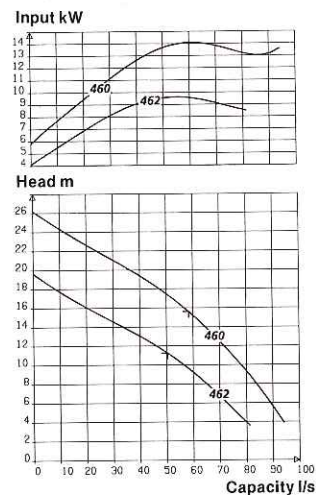

The manufacturers reserve the right to alter performance, specification or design without notice.